11400 litres (2500 imp.gal.) Three Piece Septic Tank Side Section: Pg 2 of 3

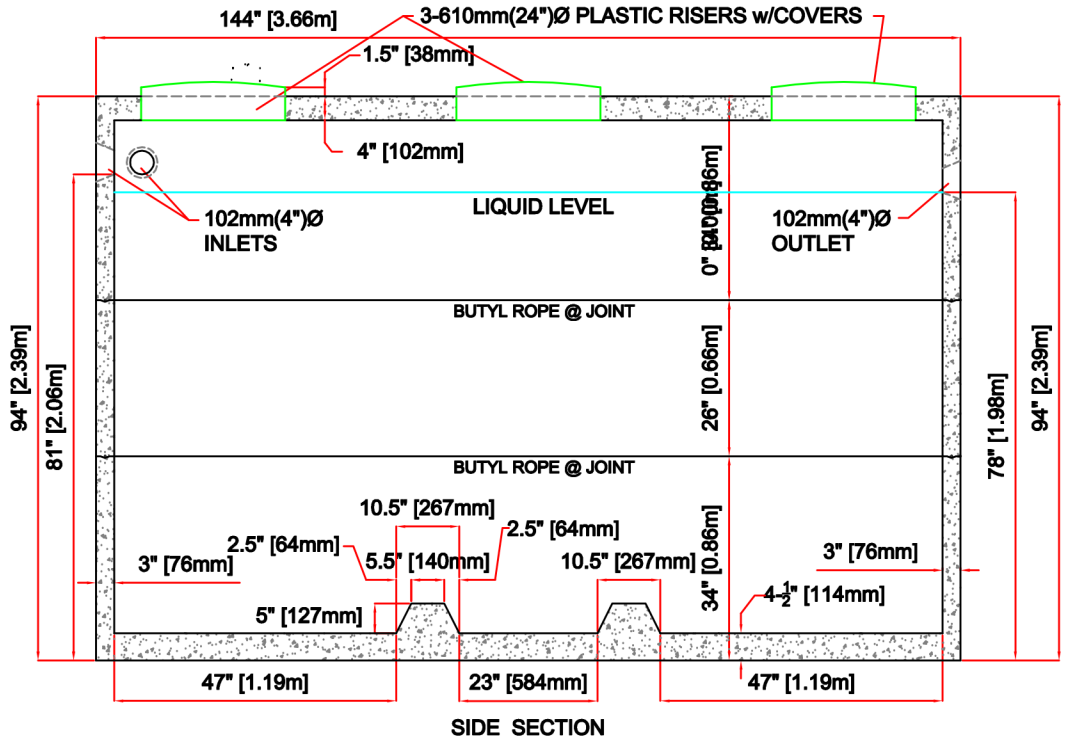

SIDE SECTION

Details

Concrete Strength: 6500 psi (45 MPa) @ 28 Days
Air Entraining: 5 - 7%

Reinforcement: 10 mm Rebar, Structural Fiber, 6x6x6/6 Gague Wire Mesh
Joint Seal: Butyl Rope Sealent Or Equivalent

Design For Earth Dead Load Only
Maximum Bury: 1.5m (5')

Conforms To CSA B66-M2005

Options

Alternative Placement Of Inlet Holes

Plastic Rsers Are Available

Other Notes

100 mm (4") Pipe Baffles Supplied

Weight: 21,250 lb (9,639 kg)

Conforms To CSA B66M05
(Dalhousie University)

ISLAND
CONCRETE PRODUCTS LTD.
SYDNEY SITE
517 KELTIC Dr.
Phone: 902-562-2426
PORT HASTINGS SITE
522 Hwy 105
Toll Free: 1-855-562-2426

BROOKFIELD
CONCRETE PRODUCTS LTD.
P. O. BOX 37, 778 Hwy 2
BROOKFIELD, N. S.
B0N 1C0
Phone: 902-673-2225
Toll Free: 1-888-705-2225
Fax: 902-673-2255

DATE: March 2016
SCALE: 3/8" = 1'-0"
PROJECT:

LOCATION:
Sheet # of

Brookfield Concrete Products Ltd.
Your Pre-cast Specialists

e-mail: info@brookfieldconcrete.ca

Island Concrete Products Ltd.
Sydney / Port Hastings

e-mail: info@islandconcreteproducts.ca