

**4800 litres (1057 imp.gal.)  
Standard Two Piece  
Septic Tank  
Pg 2 of 2**

**Details**



Concrete Strength: 5500 psi (45 MPa) @ 28 Days  
Air Entraining: 5 - 7%  
Reinforcement: 10 mm Rebar and Structural Fiber  
Joint Seal: Butyl Rope Sealant Or Equivalent  
Design For Earth Dead Load Only  
Maximum Bury: 2.0 m (6.5')  
Conforms To CSA B66-M2005

**Options**

24" Diameter Poured In Place Plastic  
Riser And Cover On Inlet End  
Alternative Placement Of Inlet And Outlet Holes  
Plastic or Concrete Risers

**Other Notes**

100 mm (4") Pipe Baffles Supplied  
Weight: 9,000 lb (4,082 kg)  
Conforms To CSA B66M05  
(Dalhousie University)

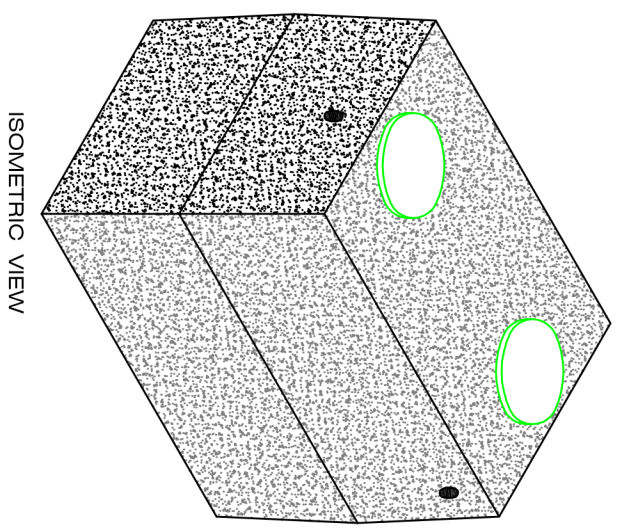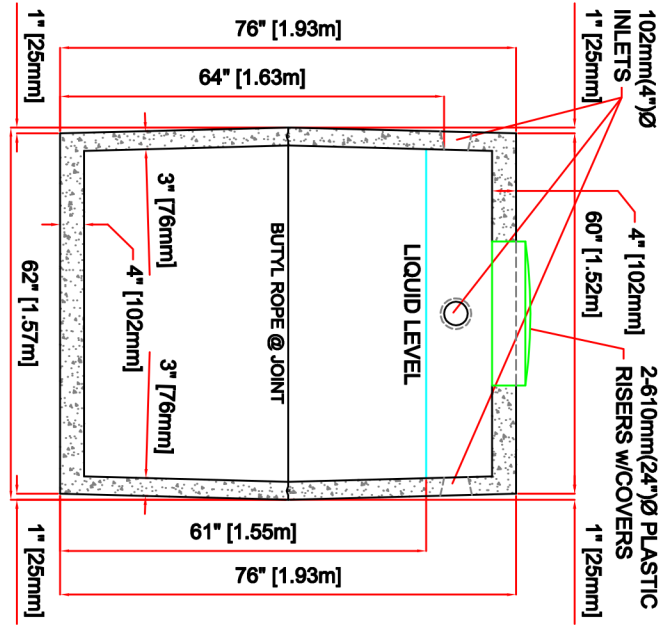

ISOMETRIC VIEW

DATE: March 2016  
SCALE: 3/8" = 1'-0"  
PROJECT:  
LOCATION: Sheet # of

**Brookfield Concrete Products Ltd.**  
*Your Pre-cast Specialists*

e-mail: [info@brookfieldconcrete.ca](mailto:info@brookfieldconcrete.ca)

**Island Concrete Products Ltd.**  
*Sydney / Port Hastings*

e-mail: [info@islandconcreteproducts.ca](mailto:info@islandconcreteproducts.ca)

**BROOKFIELD  
CONCRETE PRODUCTS LTD.**  
P. O. BOX 37, 778 HWY 2  
BROOKFIELD, N. S.  
B0N 1C0  
Phone: 902-673-2225  
Toll Free: 1-888-705-2225  
Fax: 902-673-2255

**ISLAND  
CONCRETE PRODUCTS LTD.**  
SYDNEY SITE  
517 KELTIC DR.  
Phone: 902-562-2426  
PORT HASTINGS SITE  
522 HWY 105  
Toll Free: 1-855-562-2426