

**2900 litres (640 imp.gal.)
Low Profile Two Piece
Septic Tank**

Details

Concrete Strength: 5500 psi (45 MPa) @ 28 Days
Air Entraining: 5 - 7%
Reinforcement: 10 mm Rebar and Structural Fiber
Joint Seal: Butyl Rope Sealant Or Equivalent
Design For Earth Dead Load Only
Maximum Bury: 2.0 m (6.5')
Conforms To CSA B66-M2005

Options





24" Diameter Poured In Place Plastic
Riser And Cover On Inlet End
Alternative Placement Of Inlet And Outlet Holes
Plastic or Concrete Risers
Special Order Single Compartment

Other Notes

100 mm (4") Pipe Baffles Supplied
Weight: 6900 lb (3130 kg)
Conforms To CSA B66M05
(Dalhousie University)

**ISLAND
CONCRETE PRODUCTS LTD.**
SYDNEY SITE
517 KELTIC DR.
Phone: 902-562-2426
PORT HASTINGS SITE
522 Hwy 105
Toll Free: 1-855-562-2426

**BROOKFIELD
CONCRETE PRODUCTS LTD.**
P. O. BOX 37, 778 Hwy 2
BROOKFIELD, N. S.
B0N 1C0
Phone: 902-673-2225
Toll Free: 1-888-705-2225
Fax: 902-673-2255

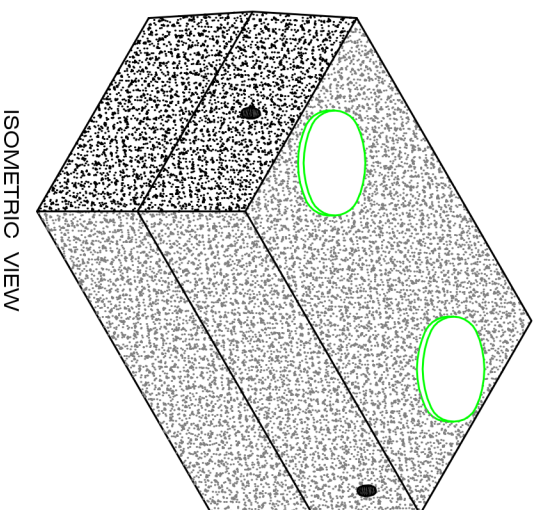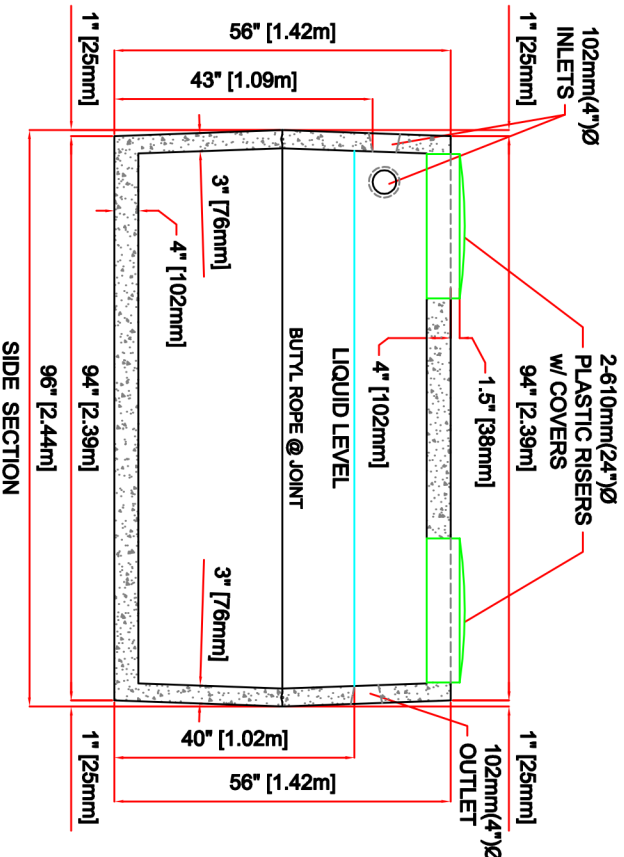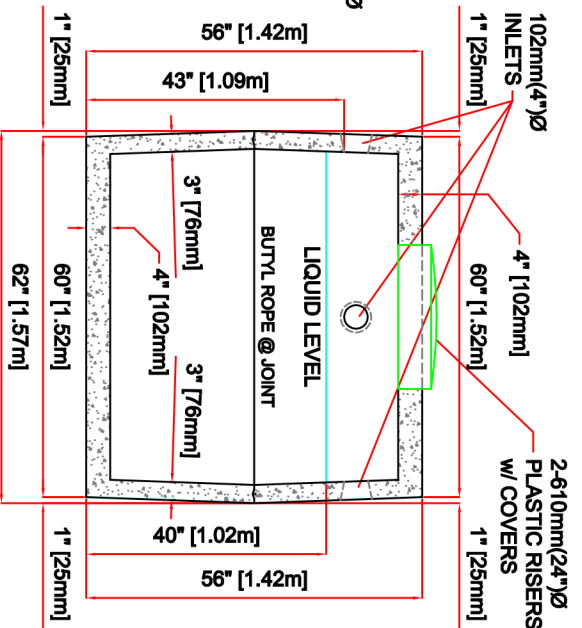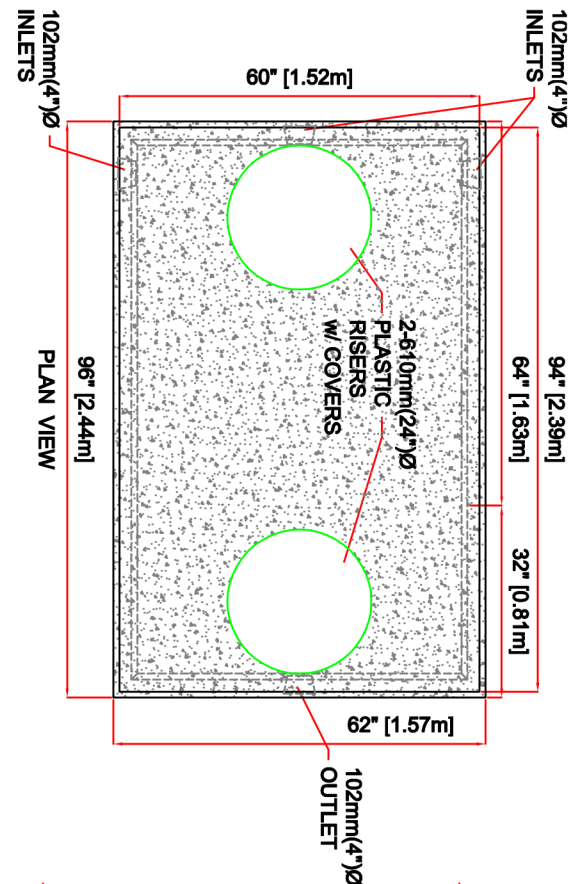

DATE: March 2016
SCALE: 3/8" = 1'-0"
PROJECT:
LOCATION:
Sheet # of

Brookfield Concrete Products Ltd.
Your Pre-cast Specialists

e-mail: info@brookfieldconcrete.ca

Island Concrete Products Ltd.
Sydney / Port Hastings

e-mail: info@islandconcreteproducts.ca