

**4800 litres (1057 imp.gal.)
1 Piece, Low Profile
Holding Tank or Pump
Chamber Pg 1 of 2**

Details



Concrete Strength: 5500 psi (45 MPa) @ 28 Days
Air Entraining: 5 - 7%
Reinforcement: 10 mm Rebar, Structural Fiber,
6x6x6 Gauge Wire Mesh
Joint Seal: Butyl Rope Sealant Or Equivalent
Design For Earth Dead Load Only
Maximum Bury: 1.5m (5')
Conforms To CSA B66-M2005

Options

Alternative Placement Of Inlet Holes
Plastic Risers Are Available

Other Notes

Pump Drawdown - 162 L (36 gal) per inch
Weight: 13,000 lb (5900 kg)
Conforms To CSA B66M05
(Dalhousie University)

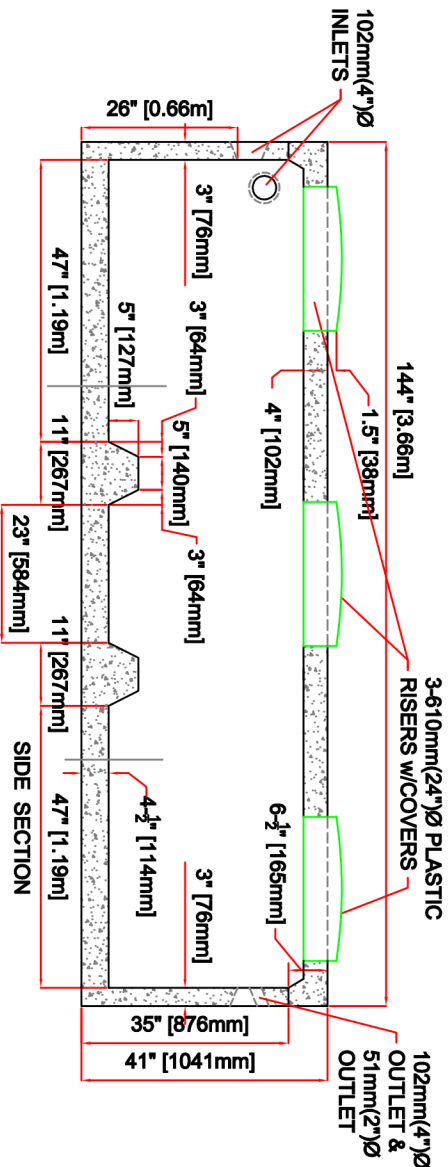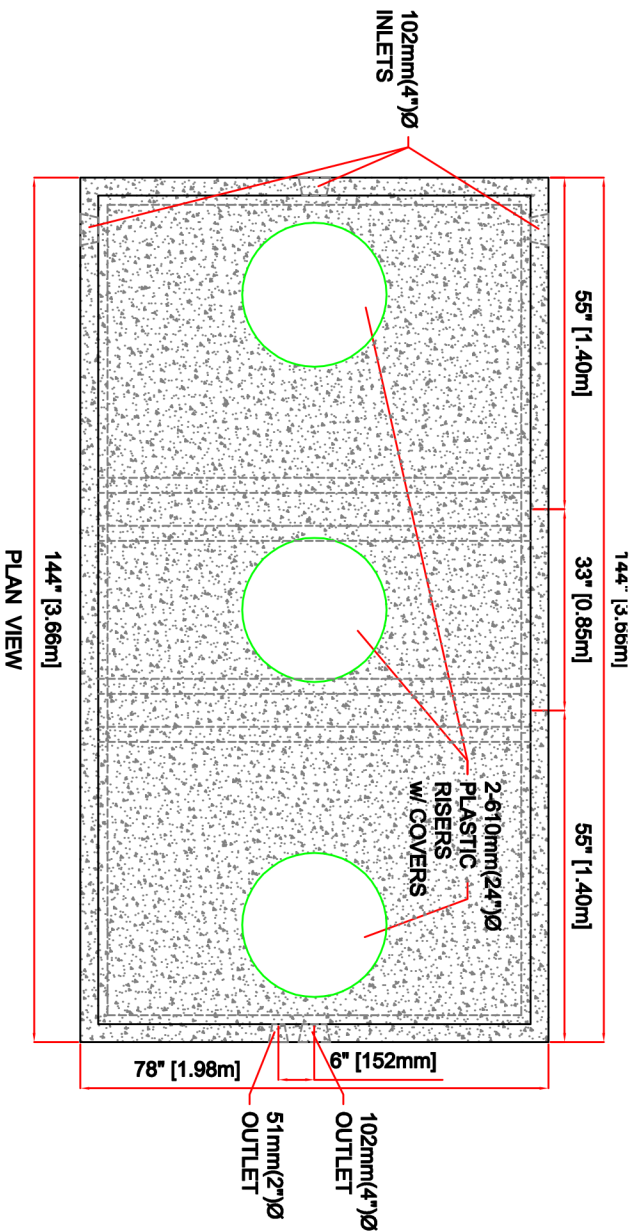

DATE: March 2016
SCALE: 3/8" = 1'-0"
PROJECT: LOCATION:
Sheet # of

Brookfield Concrete Products Ltd.
Your Pre-cast Specialists
e-mail: info@brookfieldconcrete.ca

Island Concrete Products Ltd.
Sydney / Port Hastings
e-mail: info@islandconcreteproducts.ca

**BROOKFIELD
CONCRETE PRODUCTS LTD.**
P. O. BOX 37, 778 HWY 2
BROOKFIELD, N. S.
B0N 1C0
Phone: 902-673-2225
Toll Free: 1-888-705-2225
Fax: 902-673-2255

**ISLAND
CONCRETE PRODUCTS LTD.**
SYDNEY SITE
517 KELTIC DR.
Phone: 902-562-2426
PORT HASTINGS SITE
522 HWY 105
Toll Free: 1-855-562-2426